

WE SUPPORT YOU!




CS SERIES

- CS-Vari-Angle Series
- For ductwork, walkways, HVAC equipment, and many more
- Installs on sloped or uneven surfaces
- Adapter leg accommodates 1 5/8" x 1 5/8" steel strut for framing
- Suitable for all roofing types, including sloped
- Strut is available in corrosion-resistant galvanized steel, stainless steel, or aluminum



CONSULT WITH A ROOFING CONSULTANT
FOR ALLOWABLE LOADS.

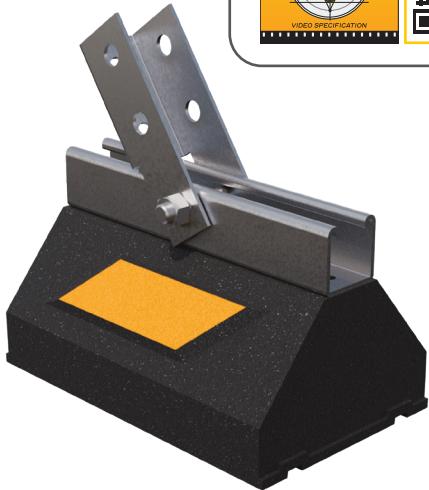

LIMITED
LIFETIME WARRANTY


MAY QUALIFY FOR
L.E.E.D CREDITS

RECOMMENDED SPACING:
REFER TO LOCAL CODE



SKU	HEIGHT	WIDTH	LENGTH	WEIGHT	MAX. LOAD
CS10	5.6" (142MM)	6" (152MM)	9.5" (241MM)	7.4 LBS	800 LBS PER 9.5" LENGTH
CS20	5.6" (142MM)	6" (152MM)	19.3" (490MM)	13.9 LBS	
CS30	5.6" (142MM)	6" (152MM)	29" (737MM)	20.3 LBS	
CS40	5.6" (142MM)	6" (152MM)	38.8" (986MM)	26.8 LBS	
CS48	5.6" (142MM)	6" (152MM)	48.5" (1232MM)	33.2 LBS	

Note: All measurements may vary by +/- 3%

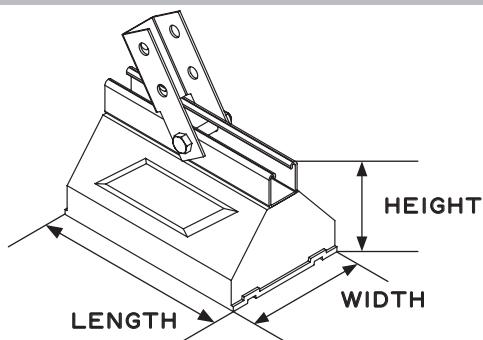

MATERIALS

BASE (C-PORT CXP):
100% RECYCLED RUBBER, UV RESISTANT

STRUT:
12-GAUGE GALVANIZED STEEL STRUT
(1 5/8" HIGH)

VARI-ANGLE BRACKET:
1 7/8" X 1 7/8" 12-GAUGE GALVANIZED STEEL



info@clearline.ca 1-866-444-0009 www.c-port.net

SCAN FOR V-SPEC

VIDEO SPECIFICATION

