

**WE SUPPORT YOU!**

SCAN FOR V-SPEC  
VIDEO SPECIFICATION



# DSAW SERIES

- DSAW Duct Support (Adjustable) Series
- Non-penetrating rooftop support
- Designed to support HVAC ductwork
- CWI2 wide-body base for increased stability
- Telescopic crossbeam for easy adjustment
- Adapts easily to any roof pitch with the vari-angle bracket
- Suitable for most types of roofing materials or other flat surfaces
- Strut is available in corrosion-resistant galvanized steel, stainless steel, or aluminum



**LIMITED LIFETIME WARRANTY**

**MAY QUALIFY FOR L.E.E.D CREDITS**


**RECOMMENDED SPACING: REFER TO LOCAL CODE**



 CONSULT WITH A ROOFING CONSULTANT FOR ALLOWABLE LOADS.

SKU	MIN. CROSSBEAM WIDTH	MAX. CROSSBEAM WIDTH	BASE LENGTH	WEIGHT	MAX. UNIFORM LOAD IN VERTICAL POSITION
DSAWI2-1831	18" (457MM)	31" (787MM)	12" (305MM)	43.9 LBS	1250 - 2200 LBS
DSAWI2-3157	31" (787MM)	57" (1448MM)	12" (305MM)	48 LBS	750 - 1250 LBS
DSAWI2-57102	57" (1448MM)	102" (2591MM)	12" (305MM)	56.1 LBS	380 - 750 LBS

**Note:** All measurements may vary by +/- 3%, and vertical struts are sold separately.

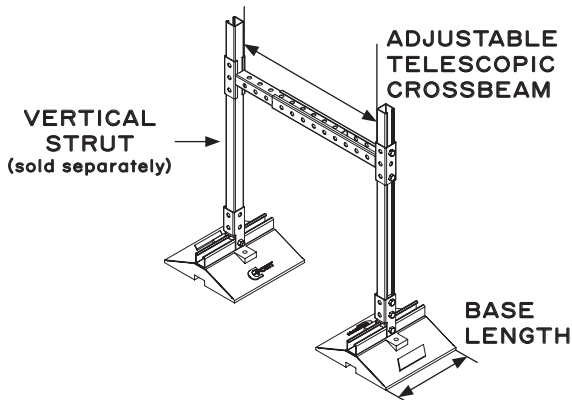

**MATERIALS**

**BASE (C-PORT CXWI2):**  
100% RECYCLED RUBBER, UV RESISTANT

**STRUT:**  
12-GAUGE GALVANIZED STEEL STRUT  
(1 5/8" HIGH)

**TELESCOPIC CROSSBEAM:**  
12-GAUGE GALVANIZED STEEL

**VARI-ANGLE BRACKET:**  
1 7/8" X 1 7/8" 12-GAUGE GALVANIZED STEEL



info@clearline.ca | 1-866-444-0009 | www.c-port.net