

WE SUPPORT YOU!

SCAN FOR V-SPEC
VIDEO SPECIFICATION



DSAW SERIES

- DSAW Duct Support (Adjustable) Series
- Non-penetrating rooftop support
- Designed to support HVAC ductwork
- Wide-body base for increased stability
- Telescopic crossbeam for easy adjustment
- Adapts easily to any roof pitch with the vari-angle bracket
- Suitable for most types of roofing materials or other flat surfaces
- Strut is only available in corrosion-resistant galvanized steel



CONSULT WITH A ROOFING CONSULTANT
FOR ALLOWABLE LOADS.



LIMITED
LIFETIME WARRANTY


MAY QUALIFY FOR
L.E.E.D CREDITS

RECOMMENDED SPACING:
REFER TO LOCAL CODE



SKU	MIN. CROSSBEAM WIDTH	MAX. CROSSBEAM WIDTH	BASE LENGTH	WEIGHT	MAX. UNIFORM LOAD IN VERTICAL POSITION
DSAW12-1831	18" (457MM)	31" (787MM)	12" (305MM)	43.9 LBS	1250 - 2200 LBS
DSAW12-3157	31" (787MM)	57" (1448MM)	12" (305MM)	48 LBS	750 - 1250 LBS
DSAW12-57102	57" (1448MM)	102" (2591MM)	12" (305MM)	56.1 LBS	380 - 750 LBS

Note: All measurements may vary by +/- 3%, and vertical struts are sold separately.

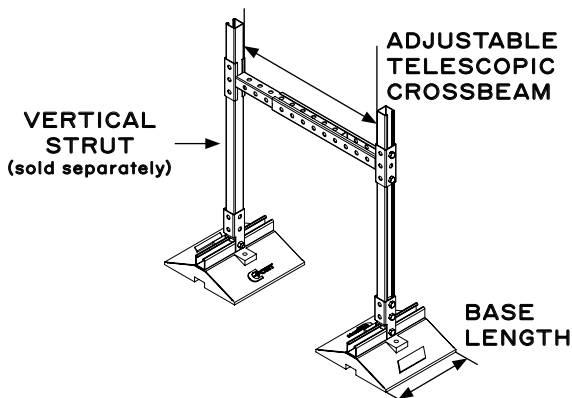

MATERIALS

BASE (C-PORT CXW12):
100% RECYCLED RUBBER, UV RESISTANT

STRUT:
12-GAUGE GALVANIZED STEEL
(1 5/8" HIGH)

TELESCOPIC CROSSBEAM:
12-GAUGE GALVANIZED STEEL

VARI-ANGLE BRACKET:
1 7/8" X 1 7/8" 12-GAUGE GALVANIZED STEEL



info@clearline.ca 1-866-444-0009 www.c-port.net

Revision Date: 06/2026