

WE SUPPORT YOU!

SCAN FOR V-SPEC VIDEO SPECIFICATION



DSA SERIES

- DSA Duct Support (Adjustable) Series
- Non-penetrating rooftop support
- Designed to support HVAC ductwork
- Telescopic crossbeam for easy adjustment
- Adapts easily to any roof pitch with the vari-angle bracket
- Suitable for most types of roofing materials or other flat surfaces
- Strut is available in corrosion-resistant galvanized steel, stainless steel, or aluminum



LIMITED LIFETIME WARRANTY

MAY QUALIFY FOR L.E.E.D CREDITS


RECOMMENDED SPACING: REFER TO LOCAL CODE

 **CONSULT WITH A ROOFING CONSULTANT FOR ALLOWABLE LOADS.**



SKU	MIN. CROSSBEAM WIDTH	MAX. CROSSBEAM WIDTH	BASE LENGTH	WEIGHT	MAX. UNIFORM LOAD IN VERTICAL POSITION
DSAIO-1831	18" (457MM)	31" (787MM)	9.5" (241MM)	34.3 LBS	1250 - 1600 LBS
DSAIO-3157	31" (787MM)	57" (1448MM)	9.5" (241MM)	38.4 LBS	750 - 1250 LBS
DSAIO-57102	57" (1448MM)	102" (2591MM)	9.5" (241MM)	46.6 LBS	380 - 750 LBS

Note: All measurements may vary by +/- 3%, and vertical struts are sold separately.

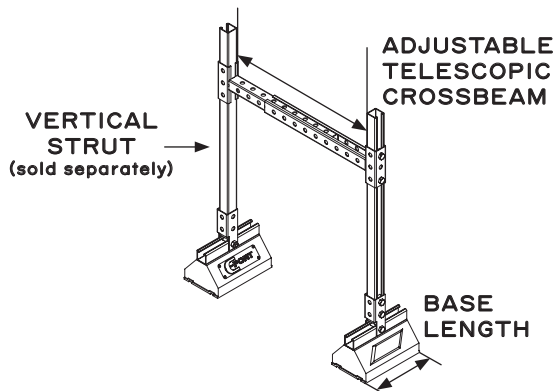

MATERIALS

BASE (CXP):
100% RECYCLED RUBBER, UV RESISTANT

STRUT:
12-GAUGE GALVANIZED STEEL STRUT (1 5/8" HIGH)

TELESCOPIC CROSSBEAM:
12-GAUGE GALVANIZED STEEL

VARI-ANGLE BRACKET:
1 7/8" X 1 7/8" 12-GAUGE GALVANIZED STEEL



info@clearline.ca | 1-866-444-0009 | www.c-port.net