

WE SUPPORT YOU!

SCAN FOR V-SPEC
VIDEO SPECIFICATION



C-PORT[®]

ROOFTOP SUPPORT SOLUTIONS

www.c-port.net

CMPW-HD SERIES



- CMPW-HD Platform Heavy Duty Series
- Non-penetrating rooftop support
- Built on C-Port's wide-body base for increased stability and load-bearing capacity
- Provides elevated support for mechanical units on rooftops and other surfaces
- Platform frames are available with rails or with a "D" deck — (12" x 2" x 13-GA steel grating)
- Customizable to meet project dimensions
- Suitable for most types of roofing materials or other flat surfaces
- Strut is available in corrosion-resistant galvanized steel, stainless steel, or aluminum



CONSULT WITH A ROOFING CONSULTANT
FOR ALLOWABLE LOADS.

LIMITED
LIFETIME WARRANTY


MAY QUALIFY FOR
L.E.E.D CREDITS

RECOMMENDED SPACING:
REFER TO LOCAL CODE



SKU	HEIGHT	WIDTH	LENGTH	NO. OF BASES	WEIGHT	MAX. UNIFORM LOAD (PLATFORM)
CMPW-HD-363612-4	12" (305MM)	36" (914MM)	36" (914MM)	4	86.7 LBS	2350 LBS
CMPW-HD-363612-4D	12" (305MM)	36" (914MM)	36" (914MM)	4	126.9 LBS	2350 LBS
CMPW-HD-484812-4	12" (305MM)	48" (1219MM)	48" (1219MM)	4	95.2 LBS	1670 LBS
CMPW-HD-484812-4D	12" (305MM)	48" (1219MM)	48" (1219MM)	4	172 LBS	1670 LBS
CMPW-HD-606012-6	12" (305MM)	60" (1524MM)	60" (1524MM)	6	144.4 LBS	2000 LBS
CMPW-HD-606012-6D	12" (305MM)	60" (1524MM)	60" (1524MM)	6	262.5 LBS	2000 LBS
CMPW-HD-487212-6	12" (305MM)	48" (1219MM)	72" (1829MM)	6	142.4 LBS	2500 LBS
CMPW-HD-487212-6D	12" (305MM)	48" (1219MM)	72" (1829MM)	6	257.7 LBS	2500 LBS

Note: All measurements may vary by +/- 3%

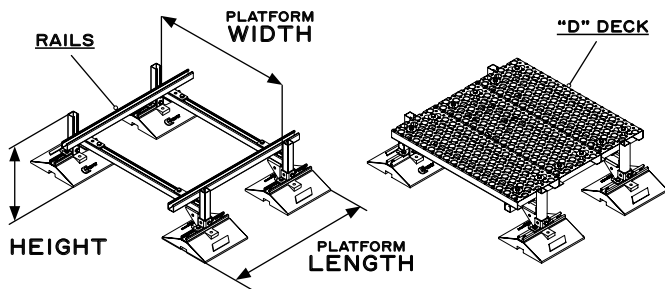

MATERIALS

BASE (C-PORT CXW12):

100% RECYCLED RUBBER, UV RESISTANT

STRUT:

14-GAUGE GALVANIZED STEEL
(13/16" HIGH)

PLATFORM:

12-GAUGE & 13-GAUGE GALVANIZED STEEL



info@clearline.ca 1-866-444-0009 www.c-port.net

Revision Date: 06/2026